

CLESSIDRA GLASS



CLEAN



CANALIZZATE

2 Uscite Posteriori (2 Motori) - Ventilazione Frontale (1 Motore) - Uscita Fumi Posteriore

2 Rear Outlets (2 Motors) - Front Ventilation (1 Motor) - Rear Exhaust Fume Outlet - 2 Salidas Traseras (2 Motores) - Ventilación Frontal (1 Motor) - Salida De Humos Trasera - 2 Sorties Arrière (2 Moteurs) - Ventilation Avant (1 Moteur) - Sortie De Fumée Arrière - 2 Ausgänge Hinten (2 Motore) - Front Gebläse (1 Motor) - Rauchausgang Hinten



Bordeaux
Bordeaux - Bordeaux
Bordeaux - Bordeaux




Bianco
White - Blanc - Blanco
- Weiß



Nero
Black - Noir - Negro
- Schwarz



TECHNOLOGY

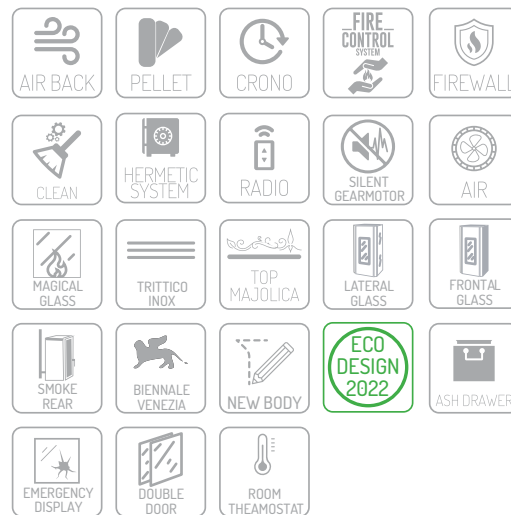

OPTIONAL



Potenza Globale
Global Power
Puissance globale
Potencia global
Verbrennungsleistung

Rendimento totale
Total efficiency
Puissance globale
Potencia global
Pellet Wirkungsgrad

Peso
Weight
Poids
Gewicht

Consumo min-MAX
Min-Max consumo
Consumation min-MAX
Consumo min-maxi
Min-Maxi verbrauch

Temperatura gas di scarico
Exhaust gas temperature
Température des gaz d'échappement
Temperatura de los gases de escape
Abgasstemperatur

Tiraggio richiesto in funzionamento
Draw required in operation
Dressier nécessaire en fonctionnement
Dibujar requerido en la operación
Erforderlicher Betriebszug

Uscita fumi
Chimney Output
Sortie conduit de cheminée
Salida conducto de humos
Rauhauslass

Ingresso aria
Air inlet
Entrée d'air
Entrada aire
Lufteinlass

Serbatoio pellet
Pellet tank
Réservoir
Depósito
Tank Fassungsvermögen

Absorbimento elettrico watt
Electrical consumption watt
Absorption électrique watt
Consumo de electricidad watt
Elektrischer Verbrauch watt

C13	KW 12,2-3,6	% 87,2	Kg 155	Kg/H 0,8-2,9	°C 232	Pa 3	mm 80	mm 60	Kg 18	M270-NI42-R40
C11	KW 11,0-3,6	% 87,6	Kg 155	Kg/H 0,8-2,6	°C 217	Pa 3	mm 80	mm 60	Kg 18	M270-NI41-R40
C9	KW 9,0-3,6	% 88,3	Kg 155	Kg/H 0,8-2,0	°C 189	Pa 3	mm 80	mm 60	Kg 18	M270-NI38-R40

*Le Caldaie e le Stufe con sistema **CLEAN** svuotano il cassetto ceneri dopo un intero **BANCALE** di **PELLET** bruciato.

